


## Load Cell Amplifier / Strain Gauge Amplifier ASR333

The ASRS333 is a sub-miniature board for 2-wire systems providing a 4mA - 20mA current output, designed to fit inside a load cell. The unit has individual multi-turn potentiometers for the precise setting of Zero and Span. The inputs provide EMI-/RF-suppression. Transducer wires can be easily soldered onto the board or connected using SIL sockets.

### Features

- Wide-range power supply 7.5V-28V
- 2.5V stabilised bridge excitation
- Bridge resistance  $\geq 700$  Ohm
- Bridge sensitivity 0.3mV/V – 3mV/V
- Size (LxBxH): 29,2mm x 15,3mm x 10mm
- Fast calibration procedure
- Reverse-polarity protection




### Applications

- Industrial Weighing
- Load Testing & Monitoring
- Industrial Process Control
- Overload Protection Systems


### Ordering

<b>Part number:</b>	<b>ASR333*</b>
<b>*Please specify required input range, between 0.3mV/V – 3mV/V</b>	
<b>Customer specific electrical / mechanical changes are possible – please contact us with your individual requirements.</b>	

### Board Connections



### Schematic Diagram

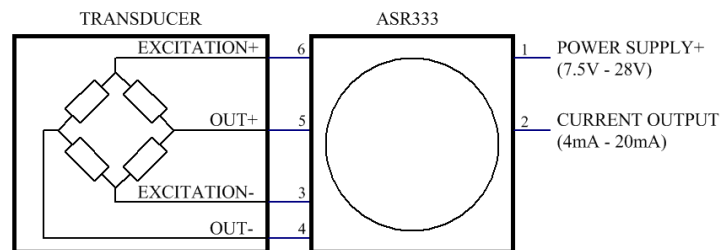

### Specifications

Parameter	Min	Typical	Max	Unit
Supply Voltage	7.5	24	28	V
Current Output – Zero (adjustable control)	2.2	4		mA
Current Output – Span (adjustable control)		20	24	mA
Bridge Sensitivity	0.3		3	mV/V
Bridge Resistance	700			Ohms
Bridge Excitation Voltage		2.5		V
Current Output Temp. Coefficient – Zero		0.25		uV/°C
Current Output Temp. Coefficient – Span		0.0025		%/°C
Operating Temperature	-20		85	°C